


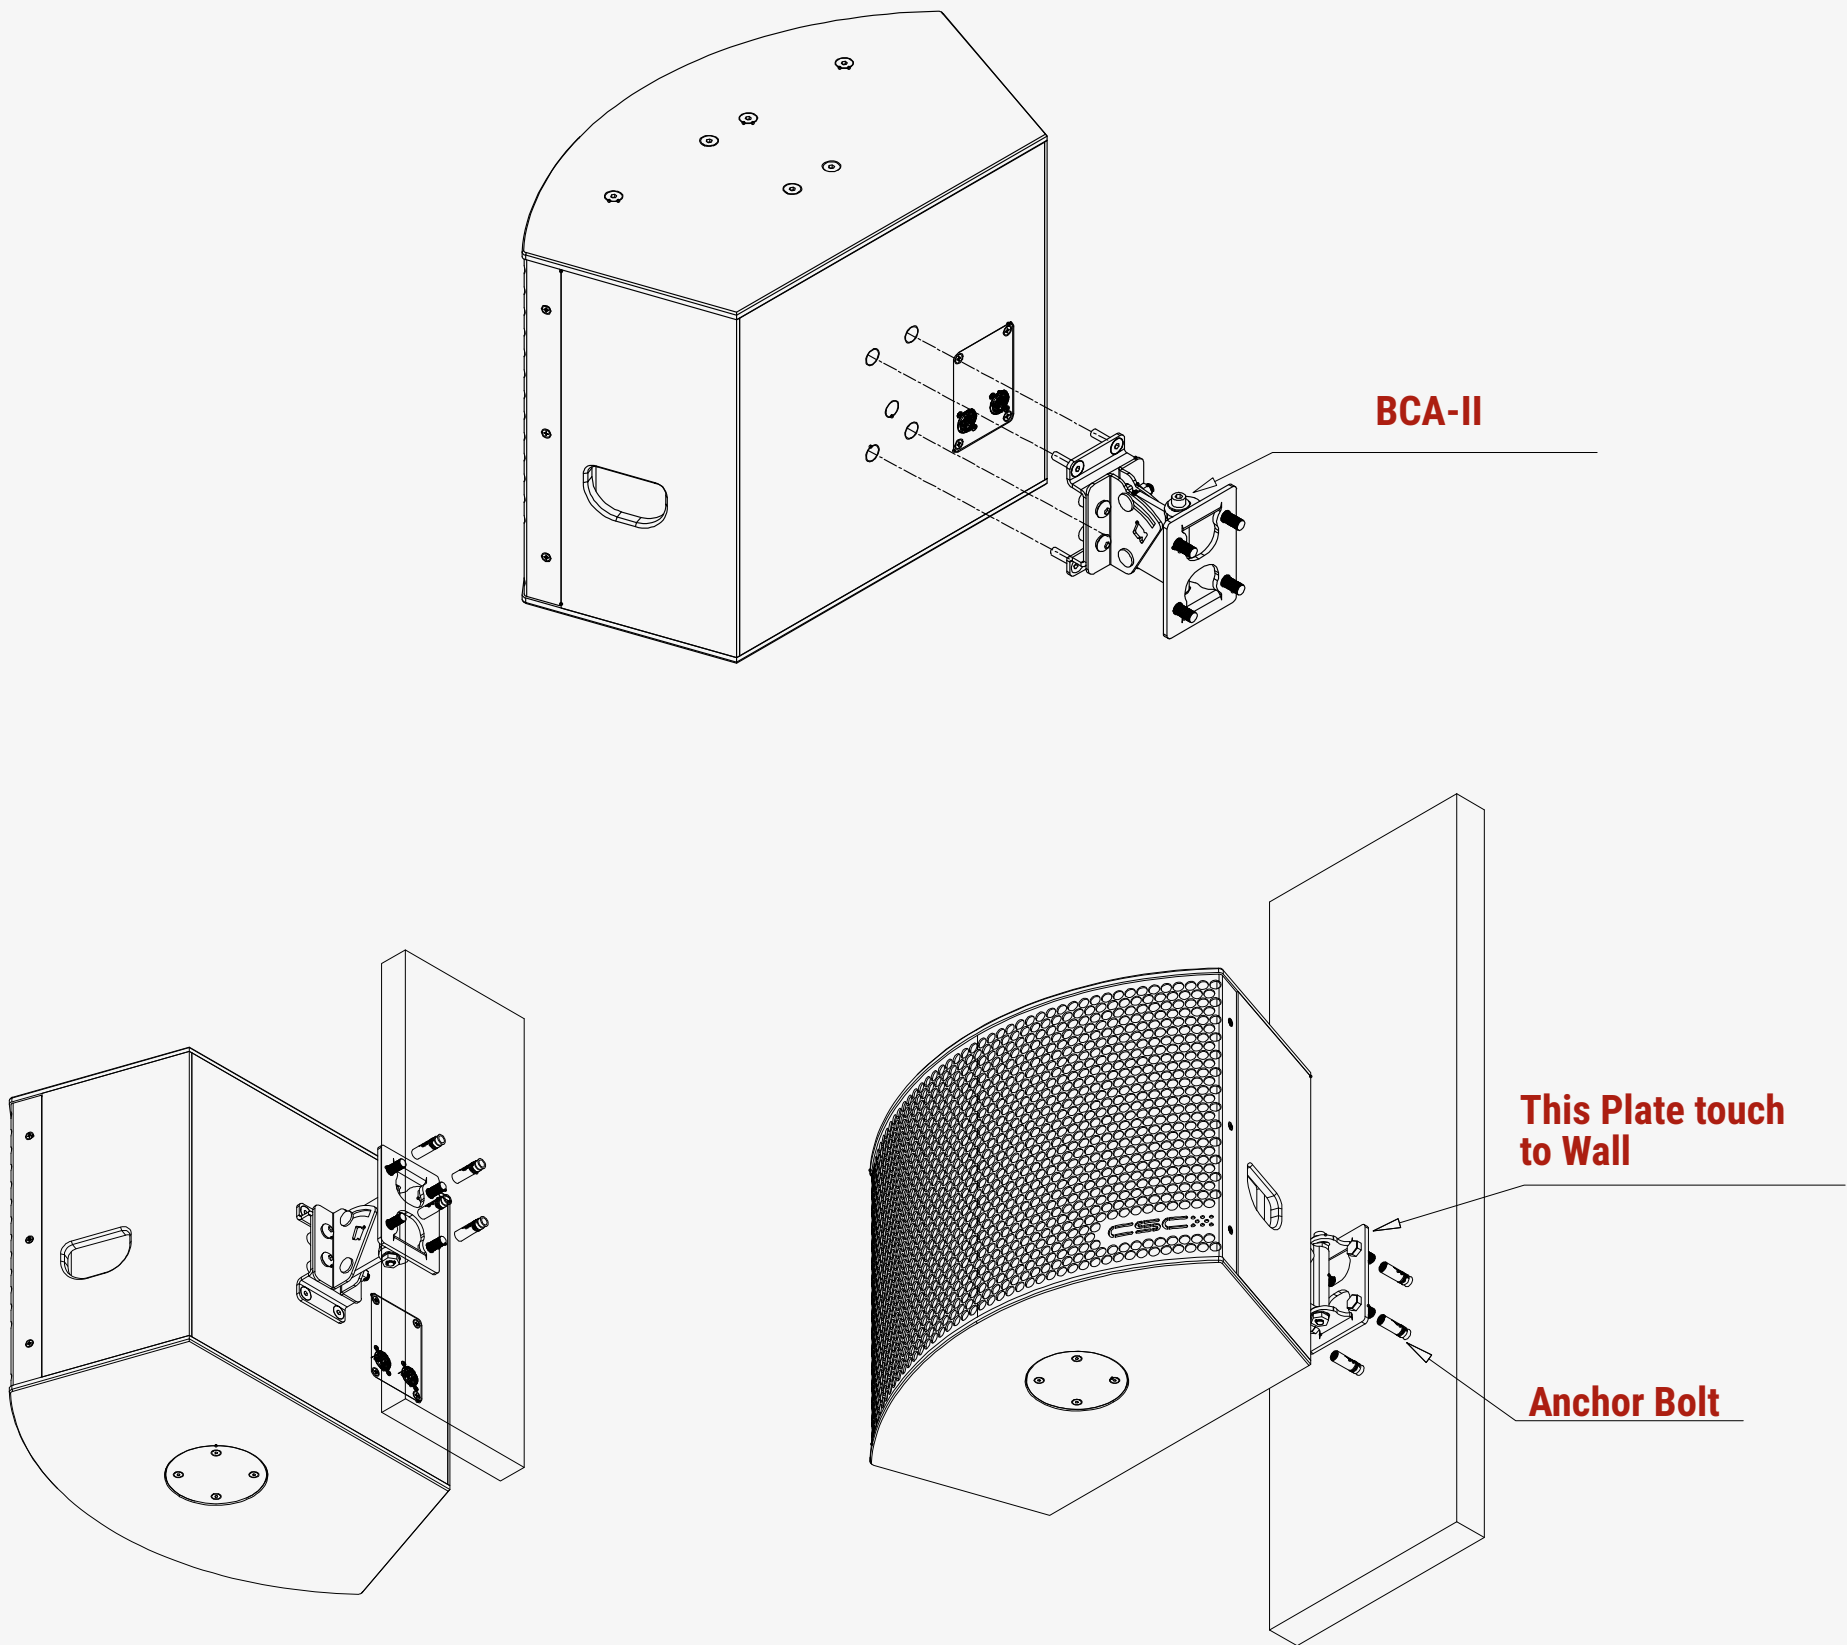


The illustration above displays the ceiling mounting arrangement for the STW28 / STW 28-16 loudspeaker and identifies the essential hardware supplied.

Components

- Loudspeaker Mount BCA-II
- Anchor Bolts M8
- STW 28 / STW 28-16 Loudspeaker.

STW 28 / STW 28-16 Wall Mounting

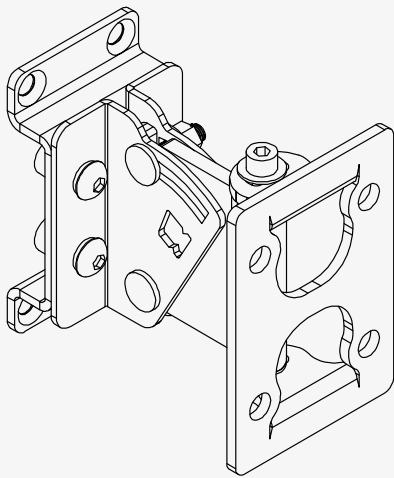

**BCA-II
Clamp Assembly**

How to mount the Loudspeaker?

- o Position BCA-II flat against the wall surface and mark the space for the bolts.
- o Insert the anchor bolts and tighten the mounts to wall
- o Remove the bolts from behind the cabinet and tighten it to the other end of the BCA II clamp.

Caution: As the load is dynamic ensure the Loudspeaker is not mounted to any surface where the anchor bolts may get loose in the wall. This could result in a major accident.